Patio Magic

TRADE MARK

AMERICA'S FINEST

ALUMINUM SLIDING GLASS DOORS

16d
Da



DOUBLE WEATHER-STRIPPING IN JAMB. ADJUSTABLE KEEPER FOR LATCH



DOUBLE WEATHER-STRIPPED, DEEP INTERLOCKING STILE



NOISELESS, DOUBLE WEATHERSTRIPPED HEADER



ADJUSTABLE, NYLON, SEALED BALL BEARING ROLLER

A.I.A. FILE NO. 16-E

NEW

Patio-rama

TRADE MARK

AMERICA'S FINEST

ECONOMY LINE SLIDING GLASS DOORS



TUBULAR LOCKING STILE, WOOL PILE WEATHERSTRIPPED JAMB AT LEADING EDGE



ADJUSTABLE BOTTOM NYLON ROLLER



DEEP JAMB WITH EXCLUSIVE NEW ADJUSTMENT FEATURE



DECORATIVE FUNCTIONAL HANDLE

GOLD ANODIZED, TUBULAR GRIP

KEY LOCK INCLUDED

Patio Magic

TRADE MARK

ALUMINUM SLIDING GLASS DOORS

VERTICAL SECTION
FOR 2 DOOR 2 TRACK OR 4 DOOR 2 TRACK
SINGLE GLAZING

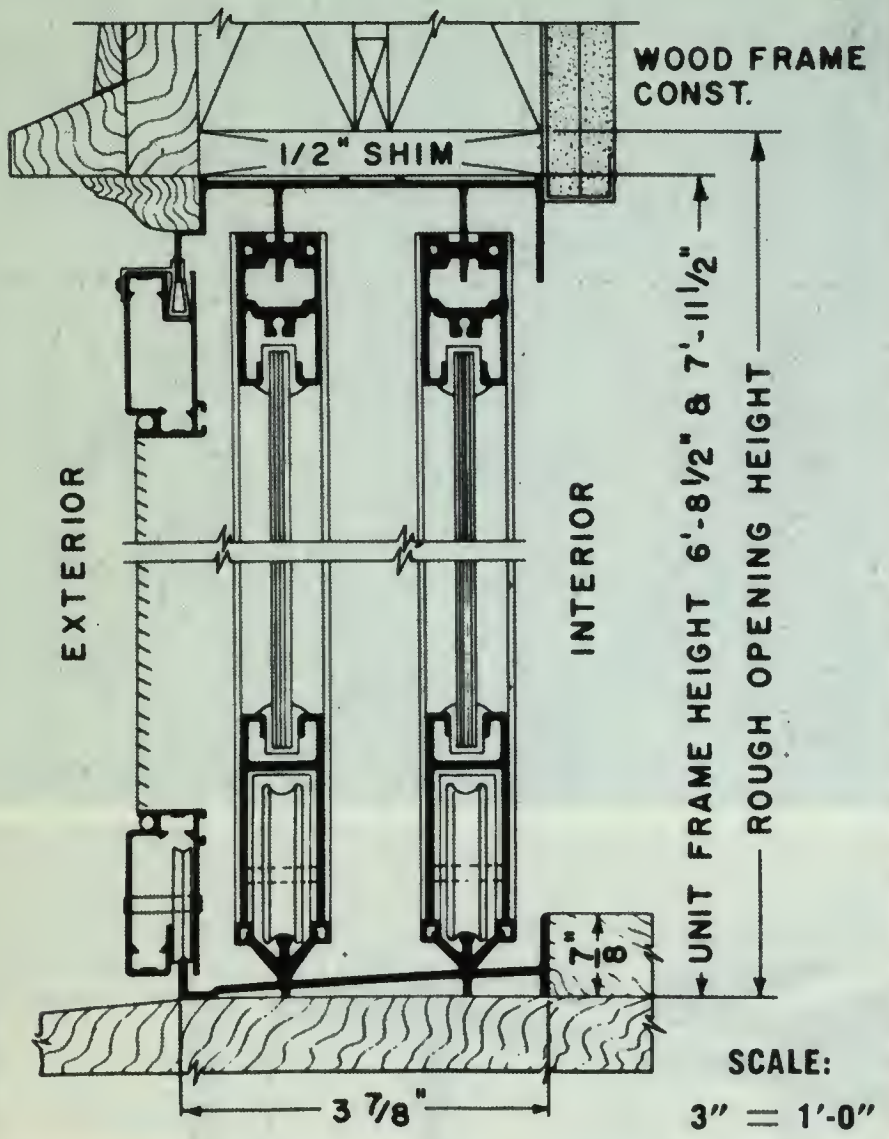

VERTICAL SECTION
FOR 2 DOOR 2 TRACK OR 4 DOOR 2 TRACK
DOUBLE GLAZING ⅝" OR 1"

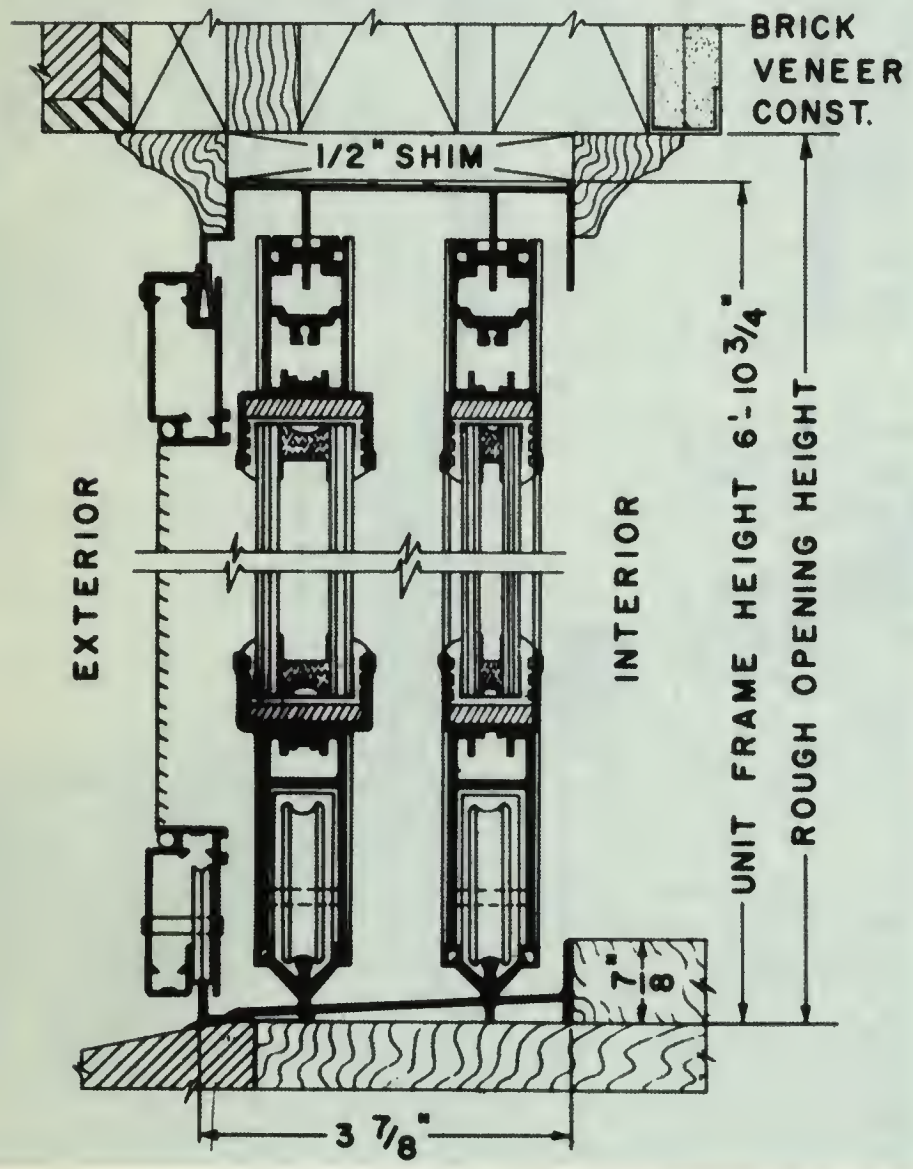

STANDARD ⅝" & 1" DOUBLE GLAZED UNITS

UNIT FRAME SIZES		UNIT DESIGNATION
Height	Width	
6'-10¾"	6'-1¹¹⁄₁₆"	PM (DG) 2D-2T— 6'x6'-10¾"
6'-10¾"	8'-1¹¹⁄₁₆"	PM (DG) 2D-2T— 6'x8'-10¾"
6'-10¾"	10'-1¹¹⁄₁₆"	PM (DG) 2D-2T—10'x6'-10¾"
6'-10¾"	9'-1³⁄₁₆"	PM (DG) 3D-3T— 9'x6'-10¾"
6'-10¾"	12'-1³⁄₁₆"	PM (DG) 3D-3T—12'x6'-10¾"
6'-10¾"	15'-1³⁄₁₆"	PM (DG) 3D-3T—15'x6'-10¾"
6'-10¾"	12'-2¹¹⁄₁₆"	PM (DG) 4D-2T—12'x6'-10¾"
6'-10¾"	16'-2¹¹⁄₁₆"	PM (DG) 4D-2T—16'x6'-10¾"
6'-10¾"	20'-2¹¹⁄₁₆"	PM (DG) 4D-2T—20'x6'-10¾"

GLASS SIZES: Height 6'-10¾"—76¾" Glass.
⅝" Glass—Widths: 3'—33" Glass; 4'—45" Glass.
1" Glass—Widths: 3'—33" Glass; 4'—45" Glass;
5'—57" Glass.

TYPES OF TRACK AVAILABLE



EXTERIOR— 2D-2T, 4D-2T



EXTERIOR— 3D-3T



INTERIOR— 2D-2T, 4D-2T



INTERIOR— 3D-3T

Pocket job details and multiple track details for Patio Magic only available on request.

UNIT FRAME SIZES		UNIT DESIGNATION
Height	Width	
6'- 8½"	6'- 0¹¹⁄₁₆"	PM 2D-2T— 6'x6'- 8½"
6'- 8½"	8'- 0¹¹⁄₁₆"	PM 2D-2T— 8'x6'- 8½"
6'- 8½"	10'- 0¹¹⁄₁₆"	PM 2D-2T—10'x6'- 8½"
6'- 8½"	12'- 0¹¹⁄₁₆"	PM 2D-2T—12'x6'- 8½"
7'-11½"	6'- 0¹¹⁄₁₆"	PM 2D-2T— 6'x7'-11½"
7'-11½"	8'- 0¹¹⁄₁₆"	PM 2D-2T— 8'x7'-11½"
7'-11½"	10'- 0¹¹⁄₁₆"	PM 2D-2T—10'x7'-11½"
7'-11½"	12'- 0¹¹⁄₁₆"	PM 2D-2T—12'x7'-11½"

GLASS SIZES: Heights: 6'- 8½"—76" Glass;
7'-11½"—91" Glass.

Widths: 3'—34" Glass; 4'—46" Glass;
5'—58" Glass; 6'—70" Glass.

STANDARD 2 DOOR-2 TRACK

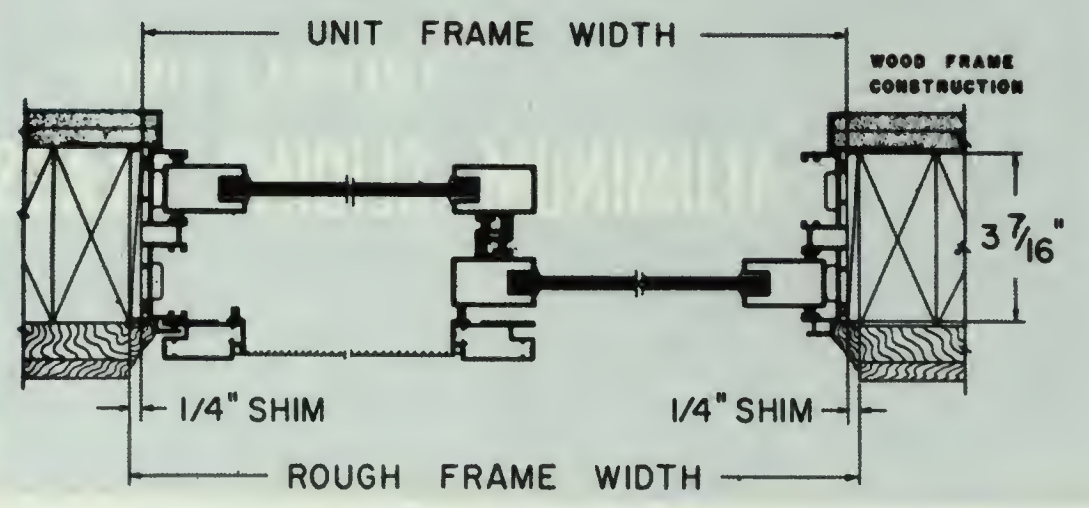

SCALE: 1½" = 1'-0"

UNIT FRAME SIZES		UNIT DESIGNATION
Height	Width	
6'- 8½"	8'-11¹¹⁄₁₆"	PM 3D-3T— 9'x6'- 8½"
6'- 8½"	11'-11¹¹⁄₁₆"	PM 3D-3T—12'x6'- 8½"
6'- 8½"	14'-11¹¹⁄₁₆"	PM 3D-3T—15'x6'- 8½"
6'- 8½"	17'-11¹¹⁄₁₆"	PM 3D-3T—18'x6'- 8½"
7'-11½"	8'-11¹¹⁄₁₆"	PM 3D-3T— 9'x7'-11½"
7'-11½"	11'-11¹¹⁄₁₆"	PM 3D-3T—12'x7'-11½"
7'-11½"	14'-11¹¹⁄₁₆"	PM 3D-3T—15'x7'-11½"
7'-11½"	17'-11¹¹⁄₁₆"	PM 3D-3T—18'x7'-11½"

GLASS SIZES: Heights: 6'- 8½"—76" Glass;
7'-11½"—91" Glass.

Widths: 3'—34" Glass; 4'—46" Glass;
5'—58" Glass; 6'—70" Glass.

STANDARD 3 DOOR-3 TRACK

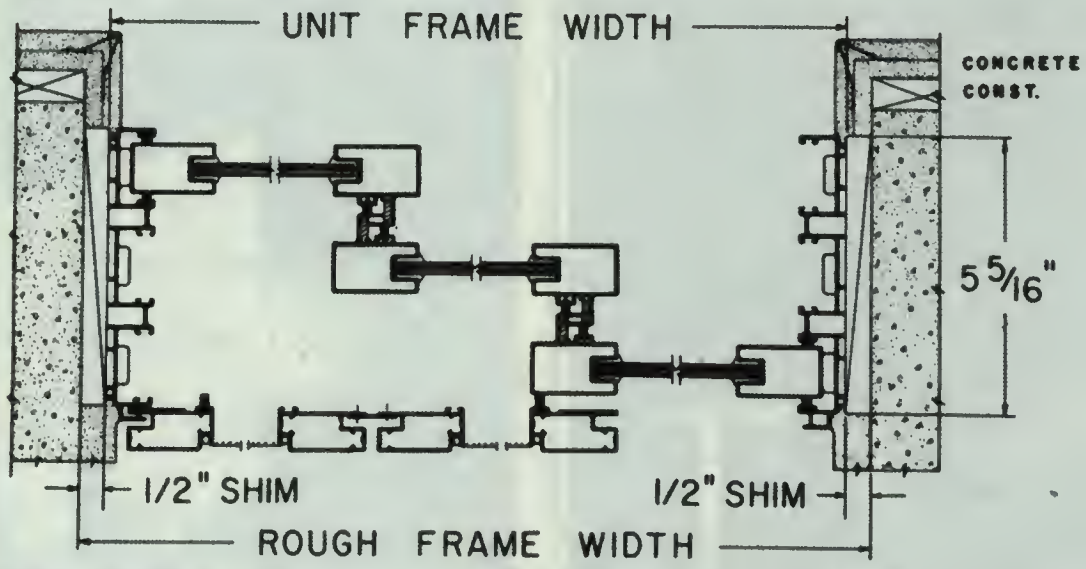

UNIT FRAME SIZES		UNIT DESIGNATION
Height	Width	
6'- 8½"	12'- 0¹¹⁄₁₆"	PM 4D-2T—12'x6'- 8½"
6'- 8½"	16'- 0¹¹⁄₁₆"	PM 4D-2T—16'x6'- 8½"
6'- 8½"	20'- 0¹¹⁄₁₆"	PM 4D-2T—20'x6'- 8½"
6'- 8½"	24'- 0¹¹⁄₁₆"	PM 4D-2T—24'x6'- 8½"
7'-11½"	12'- 0¹¹⁄₁₆"	PM 4D-2T—12'x7'-11½"
7'-11½"	16'- 0¹¹⁄₁₆"	PM 4D-2T—16'x7'-11½"
7'-11½"	20'- 0¹¹⁄₁₆"	PM 4D-2T—20'x7'-11½"
7'-11½"	24'- 0¹¹⁄₁₆"	PM 4D-2T—24'x7'-11½"

GLASS SIZES: Heights: 6'- 8½"—76" Glass;
7'-11½"—91" Glass.

Widths: 3'—34" Glass; 4'—46" Glass;
5'—58" Glass; 6'—70" Glass.

STANDARD 4 DOOR-2 TRACK

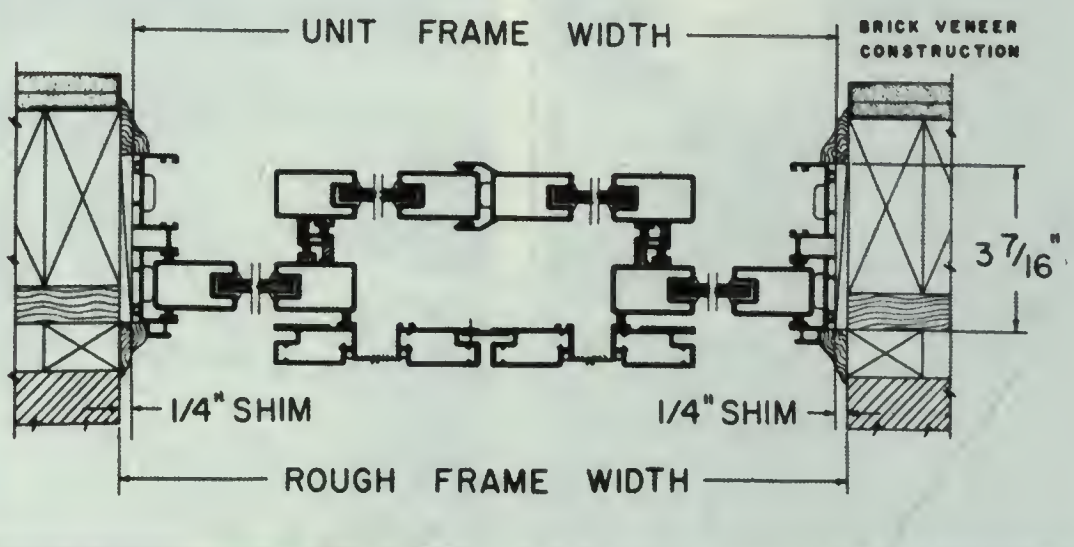

PATIO MAGIC SPECIFICATIONS

GENERAL—The aluminum sliding glass doors shall be PATIO MAGIC as manufactured by DARYL PRODUCTS CORP., Miami, Florida.

MATERIAL—Frames and doors shall be of a heavy gauge extruded aluminum of a 6063-T5 alloy. Material may be changed when deemed necessary in order to conform to the best engineering practice.

FINISH—All exposed aluminum shall be satin etched and anodized for corrosion resistance.

CONSTRUCTION—Jamb members shall be so designed as to enable them to be mechanically interlocked and fastened to the header and sill members. All vertical door stiles shall be one-piece tubular extrusions. These vertical stiles shall be machined to receive and overlap the top and bottom rail upon assembly. All doors shall be constructed to slide in two directions.

WEATHERSTRIPPING—The top rail, bottom rail, interlocking stiles and jambs shall be double weatherstripped with continuous Schlegel silicone treated certified wool pile.

HARDWARE—Spring loaded, positive acting door latches shall be provided in each locking stile. The latch lever arm shall be so constructed as to have a safety "no-lock" position. Key locks shall be furnished when specified. Gold finished handles shall be furnished for both inside and outside of all locking stiles. Bottom rollers shall have sealed ball bearings with nylon wheels. One roller in each door shall be mounted in an adjustable wheel bracket.

GLAZING—(By others except when included in original contract.) Doors shall be glazed with ¼" polished plate, ¼" or 7⁄32" heavy sheet with a specially designed vinyl glazing channel furnished by the manufacturer and in accordance with their glazing instructions. (Vinyl glazing channel for 3⁄16" glass available upon request.) ⅝" and 1" double glazing shall also be in accordance with the manufacturer's instructions.

SCREENS—(Not furnished unless specified.) Frames shall be constructed of an extruded 6063-T5 aluminum alloy. Screen cloth shall be fiberglass, woven in a 14 x 18 mesh.

INSTALLATION—(By others except when included in original contract.) Track, header, and jambs must be set plumb and level, shimming where necessary, into opening prepared in accordance with the manufacturer's drawings.

DOUBLE GLAZED HARDWARE— Handle and latch shall be a chrome finished, recessed pull.

Patio-rama

TRADE MARK

ECONOMY LINE SLIDING GLASS DOORS

VERTICAL SECTION SINGLE GLAZING

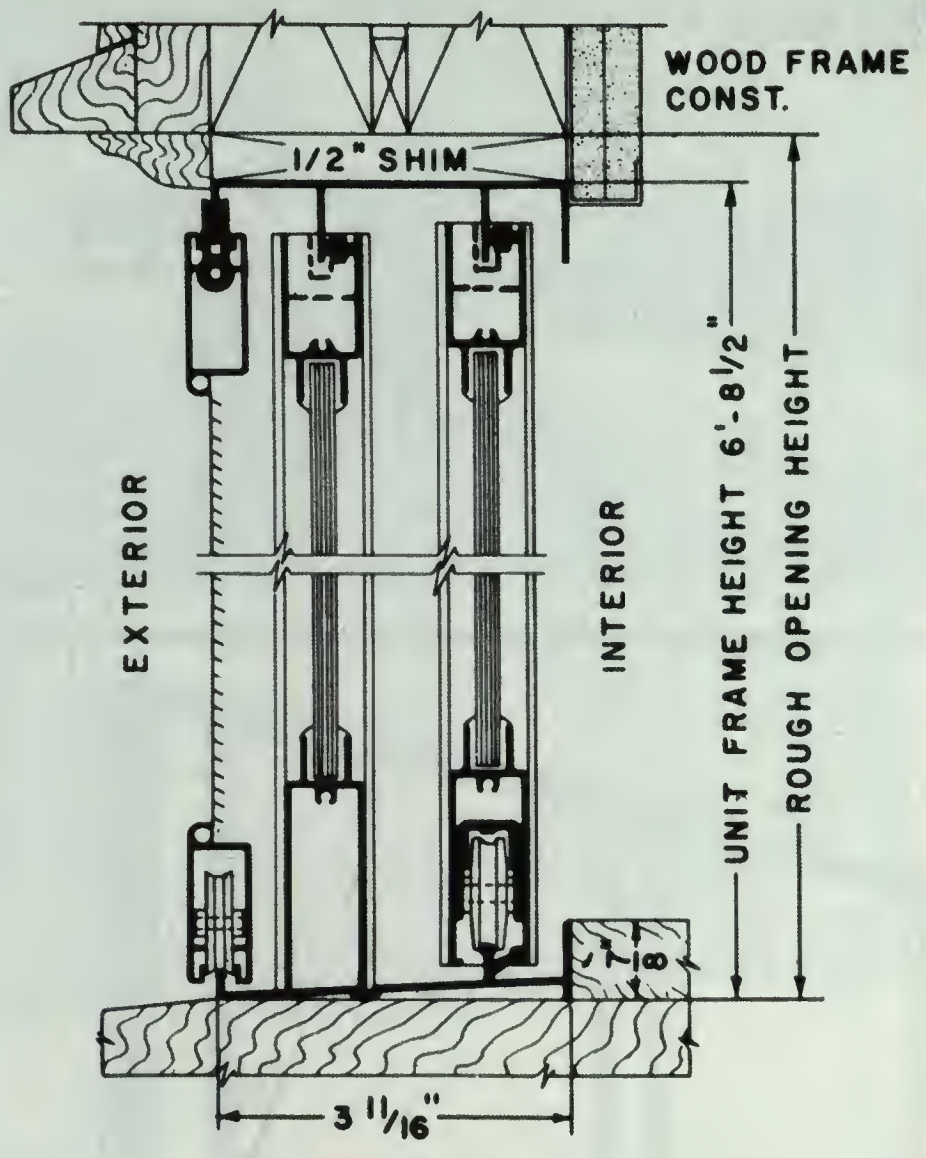

SCALE: 3" = 1'-0"

VERTICAL SECTION DOUBLE GLAZING ⅝"

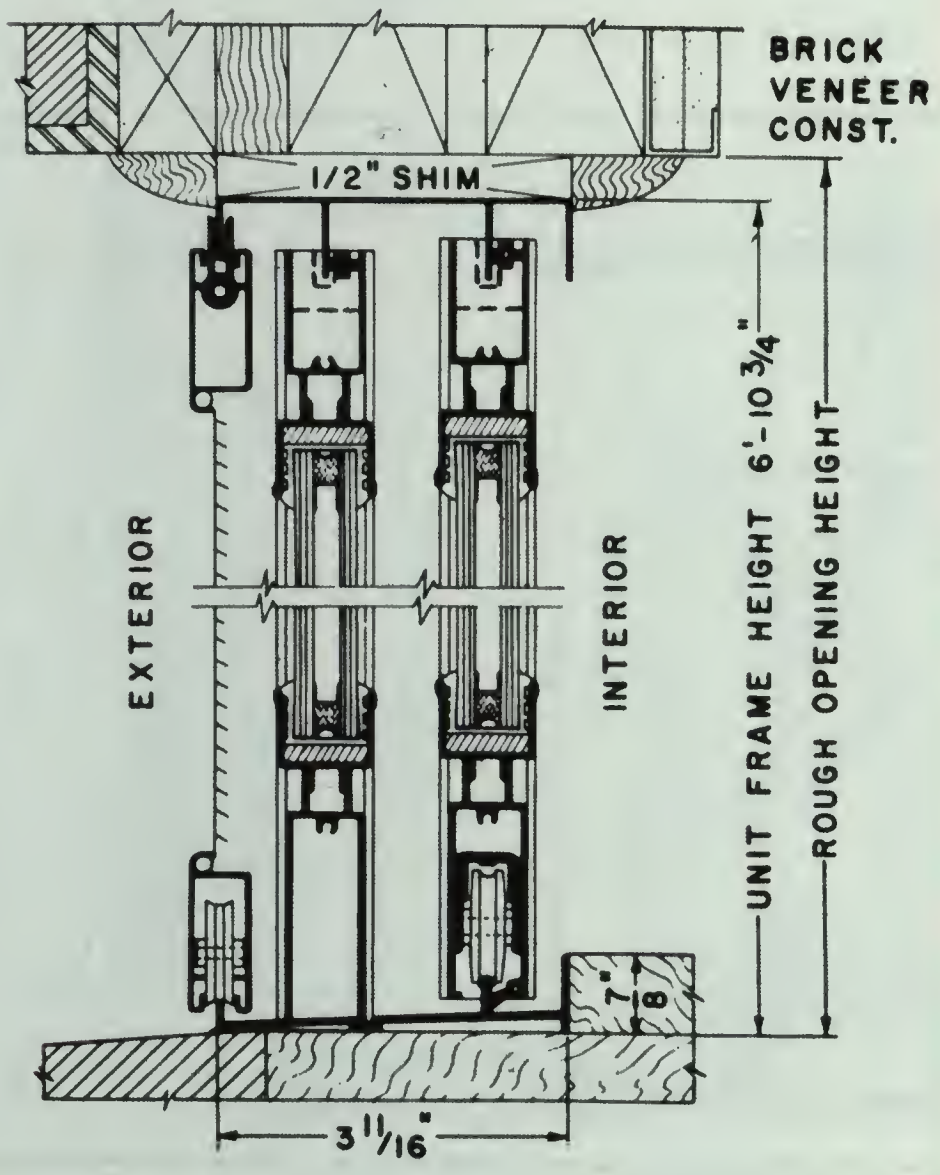

STANDARD ⅝" DOUBLE GLAZED UNITS

UNIT FRAME SIZES		UNIT DESIGNATION
Height	Width	
6'-10¾"	6'- 0¹⁄₁₆"	PR (DG) 6' XO or OX
6'-10¾"	8'- 0¹⁄₁₆"	PR (DG) 8' XO or OX
6'-10¾"	9'- 0¹³⁄₁₆"	PR (DG) 9' OXO(R) or OXO(L)
6'-10¾"	12'- 0¹³⁄₁₆"	PR (DG) 12' OXO(R) or OXO(L)
6'-10¾"	11'-11⁷⁄₁₆"	PR (DG) 12' OXXO
6'-10¾"	15'-11⁷⁄₁₆"	PR (DG) 16' OXXO

GLASS SIZES: Height 6'-10¾"–76¾" Glass.

Widths: 3'–33" Glass; 4'–45" Glass.

UNIT FRAME SIZES		UNIT DESIGNATION
Height	Width	
6'- 8½"	5'-10⁹⁄₁₆"	PR 6' XO or OX
6'- 8½"	7'-10⁹⁄₁₆"	PR 8' XO or OX
6'- 8½"	9'-10⁹⁄₁₆"	PR 10' XO or OX

GLASS SIZES: Height: 6'-8½"–76" Glass.

Widths: 3'–34" Glass; 4'–46" Glass;
5'–58" Glass.

STANDARD 2 DOOR UNIT

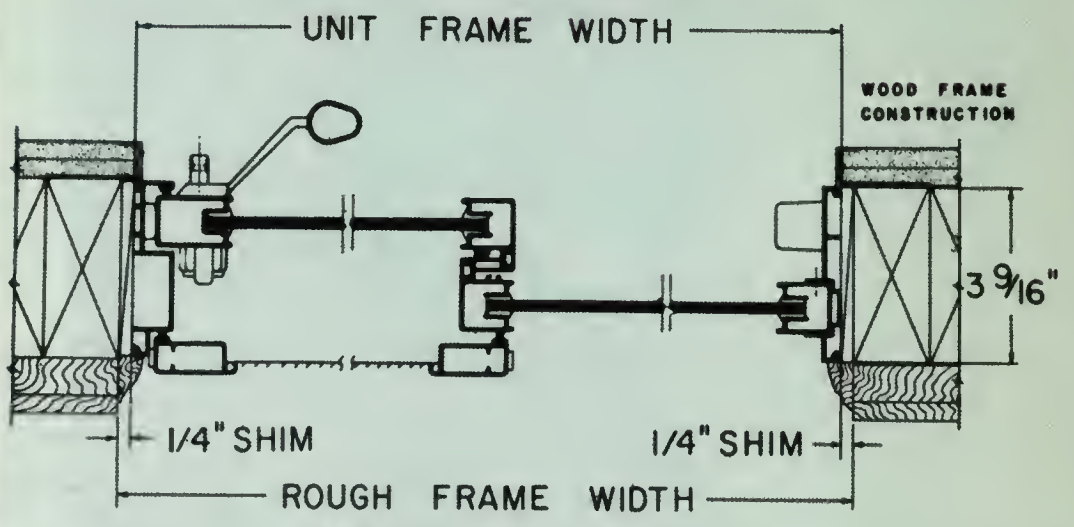

SCALE: 1½" = 1'-0"

UNIT FRAME SIZES		UNIT DESIGNATION
Height	Width	
6'- 8½"	8'-10⁹⁄₁₆"	PR 9' OXO(R) or OXO(L)
6'- 8½"	11'-10⁹⁄₁₆"	PR 12' OXO(R) or OXO(L)
6'- 8½"	14'-10⁹⁄₁₆"	PR 15' OXO(R) or OXO(L)

GLASS SIZES: Height: 6'-8½"–76" Glass.

Widths: 3'–34" Glass; 4'–46" Glass;
5'–58" Glass.

STANDARD 3 DOOR UNIT

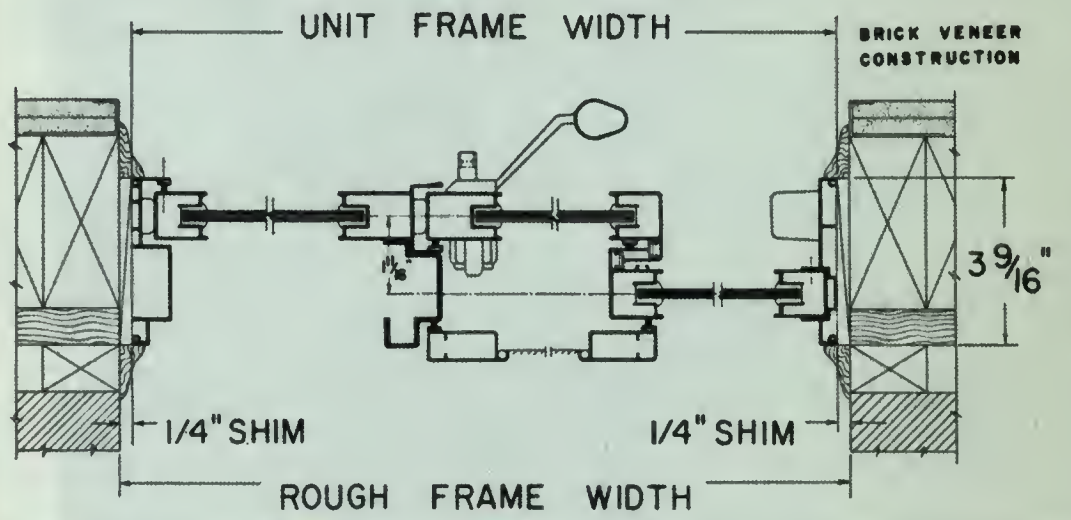

UNIT FRAME SIZES		UNIT DESIGNATION
Height	Width	
6'- 8½"	11'- 8⁷⁄₁₆"	PR 12' OXXO
6'- 8½"	15'- 8⁷⁄₁₆"	PR 16' OXXO
6'- 8½"	19'- 8⁷⁄₁₆"	PR 20' OXXO

GLASS SIZES: Height: 6'-8½"–76" Glass.

Widths: 3'–34" Glass; 4'–46" Glass;
5'–58" Glass.

STANDARD 4 DOOR UNIT

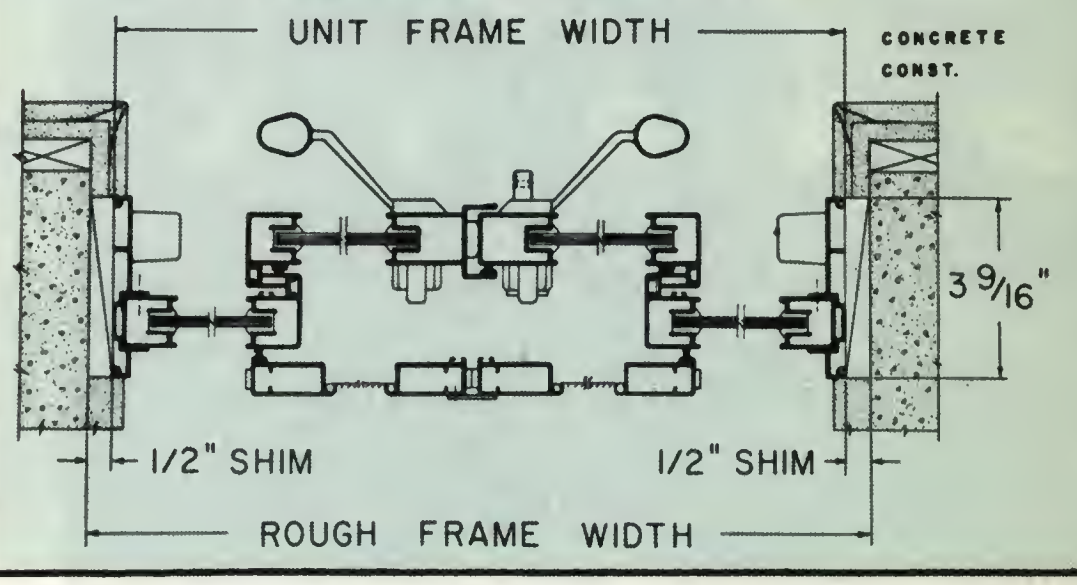

PATIO-RAMA SPECIFICATIONS

GENERAL—The aluminum sliding glass doors shall be PATIO-RAMA as manufactured by DARYL PRODUCTS CORP., Miami, Florida.

MATERIAL—Frames and doors shall be of a heavy gauge extruded aluminum of a 6063-T5 alloy. Material may be changed when deemed necessary in order to conform to the best engineering practice.

FINISH—All exposed door frames and jambs shall be satin etched and anodized for corrosion resistance.

CONSTRUCTION—Jamb members shall be so designed as to enable them to be mechanically interlocked and fastened to the header and sill members. All locking stiles shall be one-piece tubular extrusions.

WEATHERSTRIPPING—The sliding door shall be completely weatherstripped with Schlegel silicone treated, certified wool pile.

HARDWARE—Spring loaded, positive acting door latches shall be provided in each locking stile. The latch lever arm shall be so constructed as to have a safety "no-lock" position. Key locks shall be furnished in one locking stile. Door handles shall be chrome plated with a gold anodized aluminum pull bar. Bottom rollers shall have sealed ball bearings with nylon wheels. All the rollers in a sliding door shall be mounted in an adjustable wheel bracket.

GLAZING—(By others except when included in original contract.) Doors shall be glazed with ¼" polished plate, ¼" or ⁷⁄₃₂" heavy sheet with a specially designed vinyl glazing channel furnished by the manufacturer and in accordance with their glazing instructions. Glazing with ⅝" double glass shall also be in accordance with the manufacturer's instructions. (Vinyl glazing channel for ³⁄₁₆" glass available upon request.)

SCREENS—(Not furnished unless specified.) Frames shall be constructed of an extruded 6063-T5 aluminum alloy. Screen cloth shall be fiberglass, woven in a 14 x 18 mesh.

INSTALLATION—(By others except when included in original contract.) Track, header, and jambs must be set plumb and level, shimming where necessary, into opening prepared in accordance with the manufacturer's drawings.

Superbly
Engineered
Products
by

DARYL

PRODUCTS CORP.

7240 N. E. 4th Avenue
Miami 38, Florida

Patio Magic

TRADE MARK

ALUMINUM SLIDING GLASS DOORS

Patio-rama

TRADE MARK

ECONOMY LINE SLIDING GLASS DOORS

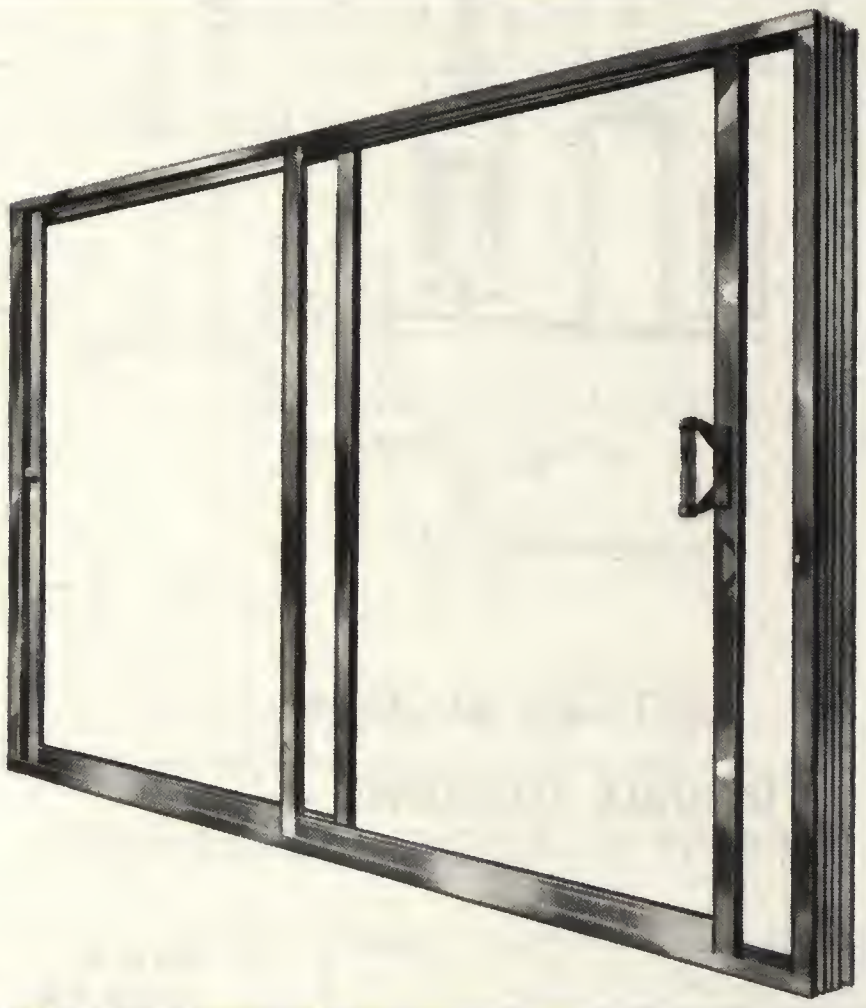

Shower Magic

TRADE MARK

BATH ENCLOSURES

Showerama

TRADE MARK

ECONOMY LINE BATH ENCLOSURES

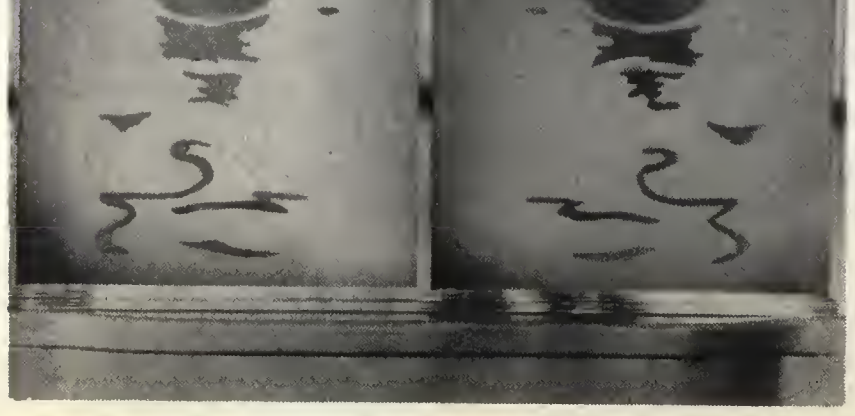

Digitized by:

INTERNATIONAL

ASSOCIATION
FOR
PRESERVATION
TECHNOLOGY,
INTERNATIONAL
www.apti.org

BUILDING
TECHNOLOGY
HERITAGE
LIBRARY

https://archive.org/details/buildingtechnologyheritagelibrary

From the collection of:

Carol J. Dyson, AIA